O. ALL DRAWINGS ARE IN METRIC MEASUREMENTS

- 1. ALL ENGINEERING PRACTICES SHALL BE APPLIED WITH REGARDS TO HOLE AND SHAFT
- 2. WHERE SCREWS OR BOLTS ARE USED THE CLEARANCE HOLES SHALL BE APPROXIMATELY 5% TO 8% LARGER THAN THE MATCHING TAPPED HOLE.
- 3. PREFERABLY ALL TAPPED HOLES AND MATCHING SCREWS AND/OR BOLTS TO BE METRIC FINE (MF)
- 4. MATERIALS SPECIFIED ON THE DRAWINGS ARE INDICATIVE ONLY. THE BUILDER CAN MAKE HIS/HER OWN MATERIAL CHOICE.
- 5. ALL CONNECTIONS/JOINTS WHICH HAVE STEAM PRESSURE APPLIED TO IT SHALL BE SILVER/HARD SOLDERED.
- 6. COMPRESSION SPRINGS ARE DRAWN IN COMPRESSED STATE (CP), UNCOMPRESSED STATE IS APPROX 40% TO 60% LONGER THEN COMPRESSED STATE.
- 7. WHERE PREFERRED SCREW OR RIVETED CONNECTIONS CAN BE OMITTED AND PARTS CAN BE BONDED TOGETHER BY USING EITHER HIGH STRENGTH GLUE, EPOXY RESIN, OR SOLDER.
- 8. PARTS WHICH ARE DIRECTLY EXPOSED TO STEAM AND/OR WATER SHOULD BE CONSTRUCTED USING NON-FERROUS OR NON CORROSIVE MATERIAL SUCH AS BRASS, BRONZE, GUNMETAL, STAINLESS STEEL, COPPER OR MONEL
- 9. THE ORDER IN WHICH THE PARTS/COMPONENTS ARE MANUFACTURED AND THE MODEL IS ASSEMBLED IS ENTIRELY LEFT TO THE BUILDER/MODEL MAKER.

 10. A COLOUR SCHEME FOR THIS PROJECT IS ENTIRELY LEFT UP TO THE MODEL MAKER.
- 11. THE MANNER IN WHICH THE PARTS/COMPONENTS ARE MANUFACTURED IS ENTIRELY LEFT UP TO THE BUILDER.
- 12. USE LOCTITE, ON SCREW OR PRESS FIT CONNECTIONS OR SURFACES, WERE DEEMED NECESSARY TO PREVENT PARTS FROM LOOSENING.
- 13. WASHER SHALL BE USED WHERE DEEMED NECESSARY
- XX. ERRORS AND/OR OMISSIONS MAY OCCUR IN THE DRAWINGS, DO NOT HESITATE TO CONTACT ME SO THAT THE ERRORS/OMISSIONS CAN BE RECTIFIED.

MATERIAL ABBREVIATIONS: (H)ALU = ALUMINIUM/HARD ALUMNIUM

BRS = BRASS

BRZ = BRONZE OR GUNMETAL (BRZ/GM)

CI = CAST IRON CU = COPPER


GRA = GRAPHITE


MS = MILD STEEL/BRIGHT MILD STEEL S/S = SILVER STEEL OR STAINLESS STEEL
SPS = SPRING STEEL

PEEK= POLYETHER ETHER KETONE

SYN = SYNTHETIC MATERIAL SUCH AS VETON, NYLON, TEFLON OR RUBBER IN GENERAL SYNTHETIC MATERIALS SOULD BE ABLE TO WITHSTAND THE HEAT AND PRESSURE(S) APPLIED TO THEM.

nnn/nnn MEANS THAT EITHER MATERIAL CAN BE USED

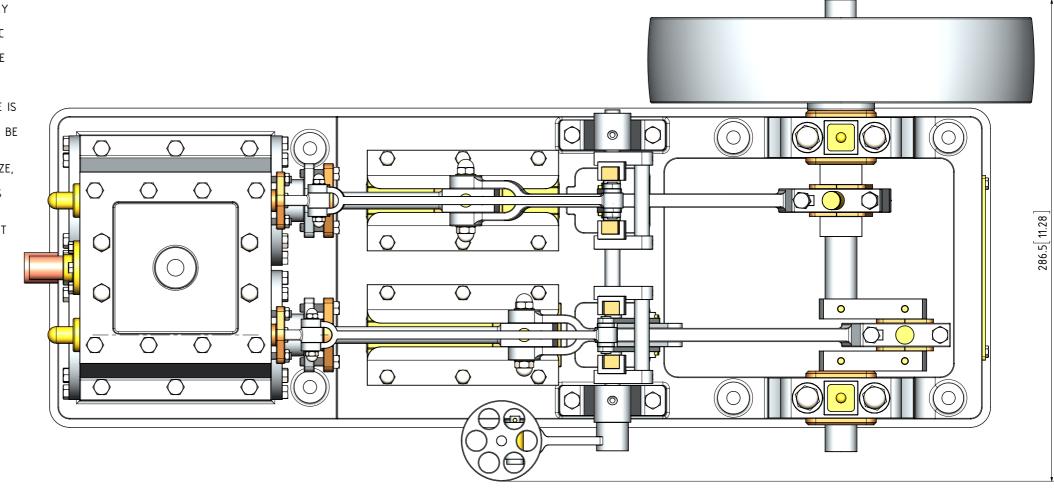

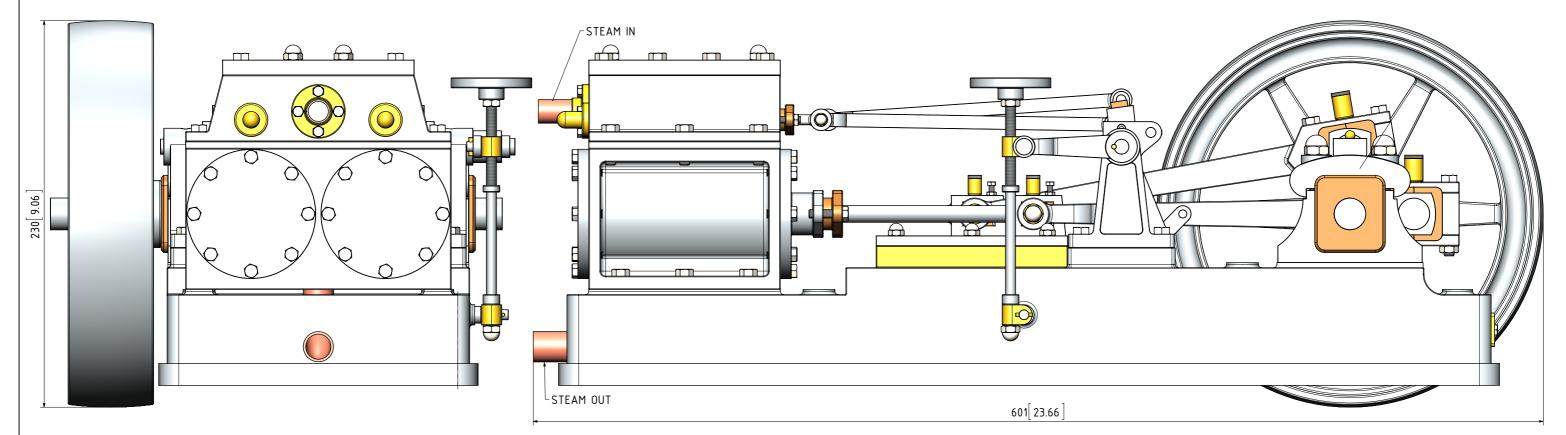

NOTES: THE ORIGINAL DRAWINGS WERE PUBLISHED IN THE "THE MODEL ENGINEER AND ELECTRICIAN" MAGAZINE OF MARCH AND APRIL 1905 UNDER THE HEADING "A MODEL HORIZONTAL ENGINE WITH JOY'S VALVE GEAR" BY H. MUNCASTER. DRAWING CONTENTS

2 CYL HORIZONTAL STEAM ENGINE WITH "JOY" VALVE GEAR BY H.MUNCASTER.

GENERAL ARRANGEMENT AND **NOTES**

JDW DRAUGHTING SERVICES I.A.M. DE WAAL. 12 BRIGHTWELL STREET PAPAKURA 2110. NEW ZEALAND. PHONE: 0064 09 2988815. MOB: 0211791000

PROJECT No 11-11-00

-MAIL: dewaal@xtra.co.nz.

MODEL SCALE: 1:1 DWG SCALE: 1:1 @A3 OR AS SHOWN MARCH-2018

Copyright S J.A.M. DE WAAL PAPAKURA NZ SHEET: 01 OF 07 A3 No:MUNCASTER11-01